

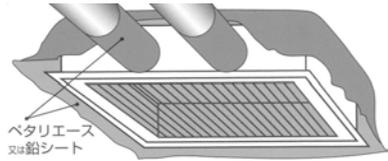

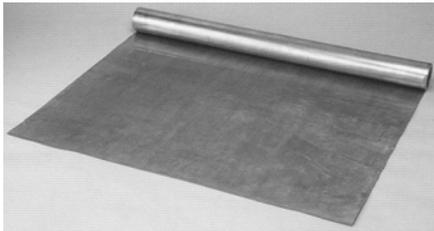
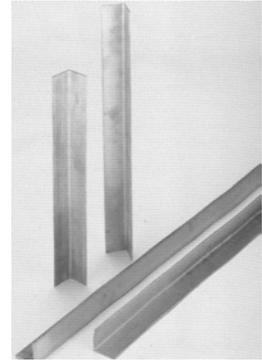



X線防護材

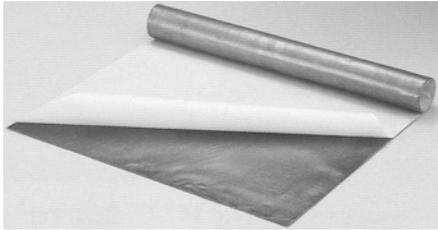

鉛シート


品番	サイズ	厚(mm)	重量(kg)
NSK-10	920mm × 1830mm	1.0	19.1
NSK-15		1.5	28.6
NSK-20		2.0	38.2
NSK-25		2.5	47.7
NSK-30		3.0	57.3
NS-10SN	1m × 2m	1.0	22.7
NS-15		1.5	34.0
NS-20		2.0	45.4
NS-25		2.5	56.7
NS-30		3.0	68.0



ペタリエース
又は鉛シート


鉛テープ

PBT-5N	30mm × 20m	0.5	3.4
PBT-10N		1.0	6.8
PBT-15N		1.5	10.2
PBT-20N		2.0	13.6
PBT-25N		2.5	17.0
PBT-30N	30mm × 10m	3.0	10.2



ペタリエース(粘着材付鉛シート)

PA-15	460mm × 2m	1.5	16.0
PA-20		2.0	21.0




ペタリテープ(粘着材付鉛テープ)

PTL-5	40mm × 10m	0.5	2.3
PTL-10	40mm × 5m	1.0	2.3
PTL-15		1.5	3.4
PTL-20		2.0	4.5

鉛コーナーテープ

* 1ケース(10本)単位の販売になります。

CNT-15	30 × 30 × 930mm	1.5	9.5(ケース)
CNT-20		2.0	12.6(ケース)



* 鉛圧はX線装置の能力及び使用条件などにより算出されます。
設計者、機器メーカーなどにご確認ください。